



**WET CHEMICAL  
FIRE EXTINGUISHER**  
6 LITRE WET CHEMICAL  
13A 75F

REMOVE SAFETY PIN AND  
DETACH APPLICATOR  
FROM 1 METRE AIM APPLICATOR  
AT FIRE AND SQUEEZE LEVER  
APPLY ENTIRE CONTENTS TO  
TOTAL AREA OF FIRE

APPLY ENTIRE CONTENTS ONTO  
TOTAL AREA OF FIRE  
AT LEAST 1 M DISTANCE

CE0086



Lic.No. NM 8877

MODEL SK 6

Regularly at least once a year check the extinguisher for correct operation. If necessary, correct the operation. For further information, contact the manufacturer. The fire extinguisher is not to be used for anything other than its intended purpose. The fire extinguisher is not to be used for anything other than its intended purpose. The fire extinguisher is not to be used for anything other than its intended purpose.

# Wet Chemicals

## Extinguishers

Model	A	B	C	D	F
SKF 6	13 A				75 F




### Product description

SFFECO wet chemical extinguishers are used for cooking oil / fat fires. The fine spray gives almost immediate flame extinguishment while the wet chemical agent reacts with oil to form a soap-like film to seal the surface of the oil and cool it down to prevent re-ignition.

### Features:

- Blend of Potassium Acetate & Citrate Agent capable of fighting class A, F Fire
- Kite Mark Certified to BS 7937:2000
- High Quality Epoxy Paints
- Thermoplastic Internal Coating to prevent corrosion
- Fine mist spray to prevent grease splashing
- Nickel Brass Plated Head Valve with simple squeeze operation
- Unique Gauge Testing System
- Unique colour code handle & Base (Optional)
- Rechargeable & easy to service.
- Passed 35KV Electrical Conductivity Test

**Ideal Use:** Commercial Kitchens in connection with pre engineered Hood System.

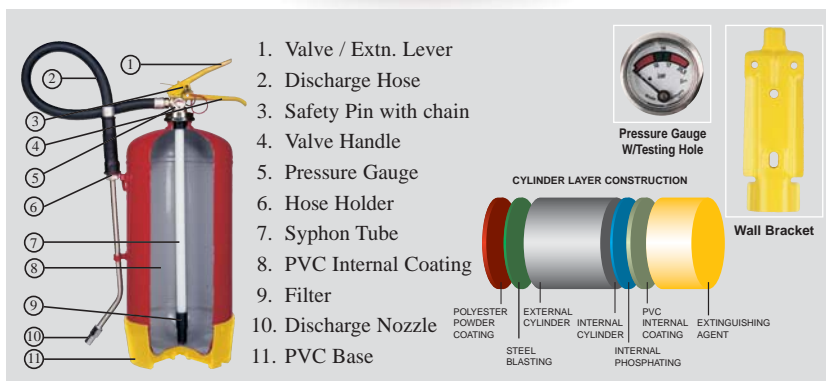

MODEL	SKF 6
Capacity	6 L
Fire Rating	13A 75F
Average discharge time	65 Sec.
Height	500 mm
Diameter	185 mm
Filled weight	11.1 kg.
Empty weight	5.1 kg.
Operating temperature	0°C to +60°C
Working Pressure at 20°C	10 bar
Maximum Service Pressure	11.7 bar
Test Pressure	30 bar



PRESSURE EQUIPMENT DIRECTIVE

