

Quick Connection Couplings Storz System for Liquids, Powders and Granulates


Symmetrical quick connection coupling, no female and male part, no problem with matching hose ends. Assembly and functionality of couplings Storz System.

Quick connection couplings with DS suffix generally are suitable for delivery and suction operation, without DS suffix for delivery operation only.


Working pressure is PN 16 if not mentioned otherwise.

- Aluminium alloys (A)
- Copper alloys (C)
- High grade steel (St)

Mounting device for clamp system

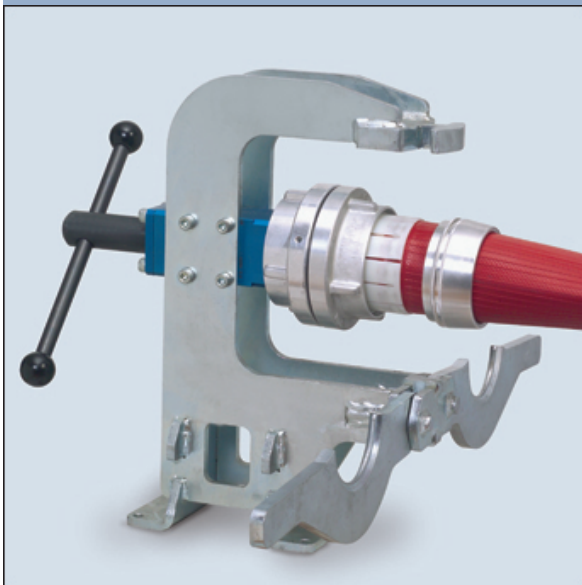

1009 Fa



1009 Fb

| Description / Type | Weight (kg) | Ident.No. | Alloy |
|--|-------------|-----------|-------|
| Appliance "Standard" including inserts for C-52 and B-75 | 8,500 | 60673999 | A |
| Insert "Standard" for C-42 | 0,800 | 60674099 | A |
| Appliance "Profi" without inserts | 12,300 | 60674199 | A |
| Insert "Profi" for C-42 | 0,800 | 60674299 | A |
| Insert "Profi" for C-52 | 0,800 | 60674399 | A |
| Insert "Profi" for B-75 | 1,250 | 60674499 | A |
| Insert "Profi" for A-110 | 1,500 | 60674599 | A |