

Emergency Exit Sign



EP-800

STANDARD FEATURES

HOUSING

- Injection-molded thermoplastic ABS housing.
- UL 94V-0 flame rating.
- Innovative, snap-together design allows for fast installation.
- Replaceable directional chevron inserts are easily removed and reinserted.
- Letter 6" height with 3/4" stroke.
- Single or double face configuration

MOUNTING

- Universal (Wall, Side or Ceiling) mounting.
- Housing snaps to canopy with simple twist and locking tightly secure housing to canopy.

ELECTRICAL FEATURES

ELECTRICAL


- 120/277 VAC Dual voltage operation.
- Low energy consumption-only 2.4 watts at 120V.
- LED indicator light and push button test switch.

LAMPS

- LEDs mounted on print circuit board.
- LED lamps are operating in normal (AC input) and emergency (DC input) modes.

BATTERY

- Nickel-Cadmium battery (4.8V 650mA) delivers more than 3 hours capacity to emergency lamps.
- 24-hour recharge after 90 minutes discharge.
- Low voltage battery disconnection-preventing deep discharge damage to the battery.

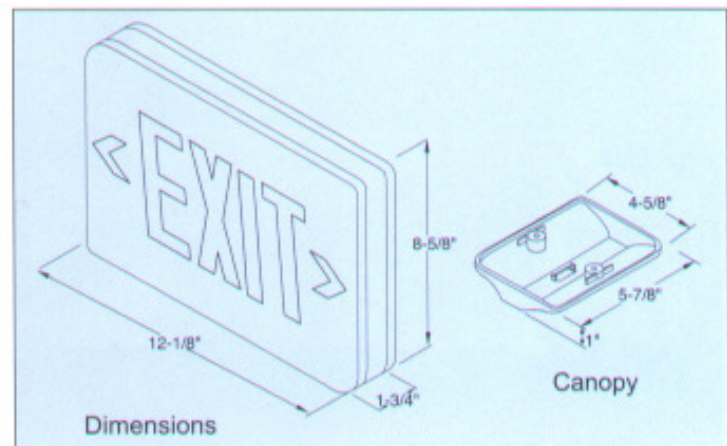

ORDERING INFORMATION

Item No.	Panel Color	Housing Color	IR Test Option	Diagnostics	Application	Packing:
EP-800	R: Red G: Green	W: White B: Black	IR1:30sec test IR2:30sec or 90min test	CT	DL: Damp Location	6PCS/CTN 9KGS(N.W.), 11KGS(G.W.)/CTN 0.032CBM/CTN (1.13CBFT/CTN) 5532PCS, 922CTNS/20'CONTAINER